
patient commission/configuration ID _____





| Item | 20mm | Description | Potential Problem | Measure | Recommended Inspection, Potential Replacement* | Latest Replacement after |
|-------------------------------------|---------------|--|-------------------|-----------|---|--------------------------------|
| System Joint | | | | | | |
| 1 | SB1069-L1220 | bearing nut | wear | replacing | every 6 months | 36 months |
| 3a | SJ9025-E000 | 0° extension stop | wear | replacing | every 6 months | if required |
| 3 | SK9525-E005 | 5° extension stop | | | | |
| 3b | SK9525-E010 | 10° extension stop | | | | |
| 3c | SK9525-E020 | 20° extension stop | | | | |
| 3d | SK9525-E030 | 30° extension stop | | | | |
| 4 | GS2611-040 | sliding washer, Ø = 26mm | wear | replacing | every 6 months | 18 months |
| 4 | GS2611-045 | | | | | |
| 4 | GS2611-050 | | | | | |
| 4 | GS2611-055 | | | | | |
| 4 | GS2611-060 | | | | | |
| 5 | PN1000-L05/5 | extension stop damper | wear | replacing | every 6 months | 6 months |
| 6a | BP1211-L060 | sliding bushing | wear | replacing | every 6 months | 18 months |
| 7 | SK0195-L/AL | cover plate, left lateral or right medial, aluminium | wear | replacing | every 6 months | 36 months |
| 7 | SK0195-R/AL | cover plate, left medial or right lateral, aluminium | | | | |
| 8 | SC1405-L14 | countersunk flat head screw with hexalobular socket | wear | replacing | every 6 months | 36 months |
| 9 | SC1406-L14 | countersunk flat head screw, hexalobular socket (axle screw) | | | | |
| System Anchors and System Side Bars | | | | | | |
| 10 | see catalogue | system anchor and system side bar | wear or breakage | replacing | every 6 months | if required |

^{*} depending on the assessment of the distributor of the custom-made product regarding the patient's usage behaviour

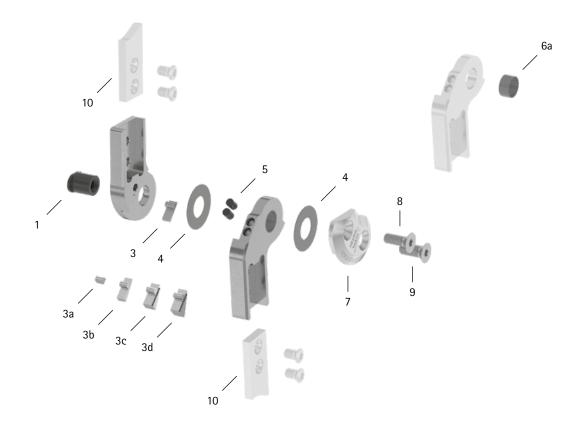